

Instant Gloss Measurement on Site



The new gloss checker IG-340 is user-friendly for measurement on site, easy to read with large display. The IG-340 can be used in a wide range of fields with easy data output via USB connection.

Used for...



Car wash, waxing, coating



Cleaning and maintenance for buildings



Cleaning solar panels



Appearance check for furnitures



Appearance check for building materials



Checking cleaning performance



Inspection for stone polishing

Enhanced Functions and Easy Use on Site

■ Compact, Lightweight and Easy Operation

30% smaller than the previous model (the IG-320). Easy to hold and carry by one hand. Gloss values can be easily managed on site with one button one function operation.



■ Large Screen Display

Indicated values can be easily confirmed when the IG-340 is placed on the floor during floor cleaning and maintenance work.



■ Environmental Rating

IP (Ingress Protection) rates as IP42*. Can be used for outdoor gloss measurement such as construction sites, solar panels, ships, trains and buses. Also can be used for stone polishing and other applications where water drops are present.



■ Internal Memory for Measured and Average Values

Measured values can be saved with a single touch. Easy operation with one hand using the side button is also available. Average value can be calculated and saved too.

■ Easy Data Output

Data transfer to PC via USB cable.



*Equivalent to IP42 when battery cover and USB cover are closed.

IP42 means protection against solid objects of 1 mm diameter and greater, and vertically falling water drops when enclosure is tilted up to 15 degrees. Wiping off water drops on the measuring spots are necessary in order to obtain accurate value.

Specification

| | |
|------------------------------|--|
| Measurement range | 0.0 to 100.0 |
| Display range | 0.0 to 199.9 [OVER] is displayed for values greater than 100.0 |
| Repeatability*1 | ±0.6 (±0.5% of full scale ±1 digit)*2 |
| Measurement area | 6 × 12 mm of ellipse |
| Measurement geometry | 60° |
| Light source | LED (880 nm) |
| Operating temperature | 0 to 40°C |
| Relative humidity | 35 to 85%RH (no condensation) |
| Environmental rating | IP42 |
| Power supply | AA battery x 2 |
| Dimensions | 61 (W) × 62 (D) × 176 (H) mm |
| Weight | 320 g or less (including batteries and protective cover) |
| Functions | <ul style="list-style-type: none"> • Auto power off (10 minutes) • Memory: 100 readings and 200 average data with date and time • Data output to PC via USB cable (Batch output of memory data, OS: Windows®10)*3 |
| Accessories*4 | <ul style="list-style-type: none"> • Protective cover with integrated calibration tile (3200840869) • Soft case (3200829076) • Lens cleaning cloth (3200829127) |

*1: Variation in values when repeated measurement are done continuously in a short time under the same condition.


*2: Full scale 100.0

*3: Please use a micro USB cable.

"Windows" is a registered trademark or trademark of Microsoft Corporation in the U.S. and other countries.

*4: Battery and USB cable are not included.

External Dimensions (mm)

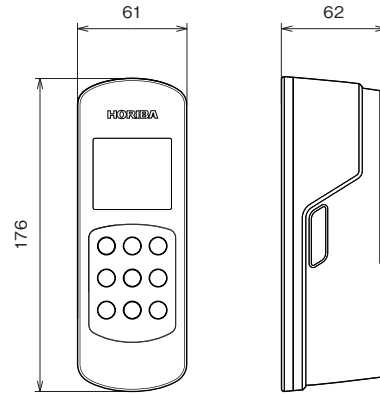

Accessories



Protective cover
(with integrated calibration tile,
3200840869)



Soft case
(3200829076)




Lens cleaning cloth
(3200829127)

Measurement standard for gloss value

When the incident light beam angle θ is fixed, the specular reflectance is determined by θ and the refractive index of the object to be measured. In the measurement of glossiness, the gloss value is defined as a specular reflectance value of a special glass which refractive index is 1.567 can be displayed as 100.

In the IG-340 is used very common incident angle $\theta=60^\circ$ and specular reflectance of the special glass is 10%. Therefore, this reflectance of 10% is displayed as glossiness 100.

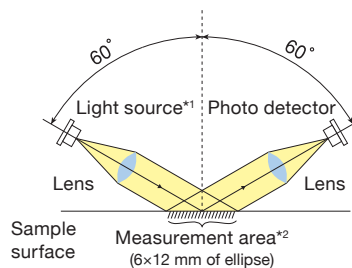

Gloss Checker
website →



*1 IR LED (HORIBA's original method) is adopted as the light source.

*2 The measuring spot must be flat as gloss is measured by the reflection of light.

IMS The HORIBA Group adopts IMS (Integrated Management System) which integrates Quality Management System ISO9001, Environmental Management System ISO14001, and Occupational Health and Safety Management System OHSAS18001. We have now integrated Business Continuity Management System ISO22301 in order to provide our products and services in a stable manner, even in emergencies.

⚠ Please read the operation manual before using this product to assure safe and proper handling of the product.

- The specifications, appearance or other aspects of products in this catalog are subject to change without notice.
- Please contact us with enquiries concerning further details on the products in this catalog.
- The color of the actual products may differ from the color pictured in this catalog due to printing limitations.
- It is strictly forbidden to copy the content of this catalog in part or in full.
- The screen displays shown on products in this catalog have been inserted into the photographs through compositing.
- All brand names, product names and service names in this catalog are trademarks or registered trademarks of their respective companies.

<http://www.horiba.com>

HORIBA, Ltd. Japan
Head Office
2 Miyahogigashi-cho, Kisshoin, Minami-ku, Kyoto, 601-8510, Japan
Phone: 81 (75) 313-8121 Fax: 81 (75) 321-5725

HORIBA (Thailand) Limited Thailand
East Office
850 / 7 Soi Lat Krabang 30 / 5, Lat Krabang Road, Lat Krabang, Bangkok 10520, Thailand
Phone: 66 (0) 2734 4434 Fax: 66 (0) 2734 4438

HORIBA Instruments (Singapore) Pte Ltd. Singapore
3 Changi Business Park Vista #01-01, Akzonobel House, Singapore 486051
Phone: 65 (6) 745-8300 Fax: 65 (6) 745-8155

HORIBA Instruments (Singapore) Pte Ltd., Manila Office Philippines
27/F Tower 2, Enterprise Center 6766, Ayala Avenue cor Paseo de Roxas, Makati City, Philippines, 1226
Phone: 63 (2) 8885-8500

HORIBA Vietnam Company Limited Vietnam
Lot 3 and 4, 16 Floor, Detech Tower II, No.107 Nguyen Phong Sac Street, Dich Vong Hau Ward, Cau Giay District, Hanoi, Vietnam
Phone: 84 (24) 3795-8552 Fax: 84 (24) 3795-8553

HORIBA (China) Trading Co., Ltd. China
Unit D, 1F, Building A, Synnex International Park, 1068 West Tianshan Road, 200335, Shanghai, (China)
Phone: 86 (21) 6289-6060 Fax: 86 (21) 6289-5553

Beijing Branch
12F, Metropolis Tower, No.2, Haidian Dong 3 Street, Beijing, 100080, China
Phone: 86 (10) 8567-9966 Fax: 86 (10) 8567-9066
Guangzhou Branch
Rm 1611/1612, Goldlion Digital Network Center, 138 Tiyu Road East Guangzhou 510620, China
Phone: 86 (20) 3878-1883 Fax: 86 (20) 3878-1810

HORIBA Taiwan, Inc. Taiwan
8F.-8, No.38, Taiyuan St. Zhubei City, Hsinchu County 30265, Taiwan (R.O.C.)
Phone: 886 (3) 560-0606 Fax: 886 (3) 560-0550

HORIBA KOREA Ltd. Korea
25, 94-Gil, Iljik-Ro, Manan-Gu, Anyang-Si, Gyeonggi-Do, 13901, Korea
Phone: 82 (31) 296-7911 Fax: 82 (31) 296-7913

PT HORIBA Indonesia Indonesia
Jl. Jalur Sutra Blok 20A, No.16-17, Kel. Kunciran, Kec. Pinang Tangerang-15144, Indonesia
Phone: 62 (21) 3044-8525 Fax: 62 (21) 3044-8521

HORIBA Instruments Incorporated USA
9755 Research Drive, Irvine, CA 92618, U.S.A.
Phone: 1 (949) 250-4811 Fax: 1 (949) 250-0924
Houston Office
5390 Bay Oaks Drive, Pasadena, TX 77505
Phone: 1 (281) 482-4334 Fax: 1 (281) 674-6058

HORIBA Instruments Brasil, Ltda. Brazil
Rua Presbitero Plinio Alves de Souza, 645, Loteamento Multivias, Jardim Ermida II - Jundiáil Sao Paulo - CEP 13.212-181 Brazil
Phone: 55 (11) 2923-5400 Fax: 55 (11) 2923-5490

HORIBA UK Limited UK
Kyoto Close Moulton Park Northampton NN3 6FL UK
Phone: 44 (0) 1604 542500 Fax: 44 (0) 1604 542699

HORIBA India Private Limited India
246, Okhla Industrial Estate, Phase 3 New Delhi-110020, India
Phone: 91 (11) 4646-5000 Fax: 91 (11) 4646-5020

Technical Center
D-255, Chakan MIDC Phase-II, Hambholi Village, Pune-410501, India
Phone: 91 (21) 3567-6000
Bangalore Office
No.55, 12th Main, Behind BDA Complex, 6th sector, HSR Layout, Bangalore South, Bangalore-560102, India
Phone: 91 (80) 4127-3637